

30W FLUSH MOUNT POWER SUPPLY

Our range of encapsulated 30W power supplies offers the perfect solution if your application demands extended service life and protection from harsh environments.

The compact shape is designed to be out of sight, fitting comfortably inside a wall mount installation box. Alternatively the power supply can be fixed to any surface using the integrated mounting holes. Polyurethane potting resin protects the electronic components from mechanical stress and water ingress to IP68.

Features

- Fully encapsulated
- IP68 waterproof
- MTBF 43 years at 50°C ambient
- Ultra low standby losses
- High Efficiency
- Protection class II
- Various connection options
- Thermally protected and short circuit proof
- Premium quality Japanese brand capacitors
- Manufacturing according to ISO 9001
- Designed in Austria
- Made in the Czech Republic
- Optional DIN rail housing variant available

Specification		
Output Power	30	W
Output Voltage	5 - 24	V
Output current	3	A
Universal input voltage	90 - 264	V
Operating temperature	-20 - 70	°C
Efficiency	typ. 88,5	%
Standby Power	typ. 50	mW
Efficiency level	VI	
Means of protection	2 x MOPP	
Insulation of output	SELV	
Leakage current	max. 100	µA



Test standards		
Test standard	Valid for voltage types	Explanation
EN 55014-1 EN 55014-2 EN 55032 EN 55035 EN 60601-1-2	5-24V 5-24V 5-24V 5-24V 5-24V	General EMC standards
EN 60950-1 OVCII UL 60950-1 OVCII EN 62368-1 OVCII UL 62368-1 OVCII	12V, 24V 12V, 24V 5-24V 5-24V	Information technology equipment
EN 60335-1 OVCII EN 61558-2-16 OVCIII EN 61558-1 OVCIII	12V, 24V 12V, 24V 12V, 24V	Household devices
EN 60601-1 OVCIII ES 60601-1 OVCII	5-24V 12V, 24V	Medical electrical equipment
EN 61347-2-13 OVCII EN 61347-1 OVCII	12V, 24V 12V, 24V	Electronic controlgear for LED modules

Approvals	
    	

Connections	Ordering code
Fixed wire leads	N1hFSW3 30
Insulated input cable	N1hISW3 30
PCB mount pins	N1hPSW3 30
Terminal blocks	N1hKSW3 30
DIN rail housing	N1hDSW3 30



Parameter	Symbol	Min	Typ.	Max	Unit	Test Cond.
Specifications are subject to change without any notice.						
Input Voltage	U _{IN}	90		264	V _{AC}	
	Operation above the specified maximum input voltage may cause damage. Below the minimum input voltage the unit does not meet the specification.					
Input Current	I _{IN}	9	290	1000	mA	
Input Frequency	f _{IN}	47	50	63	Hz	
Efficiency	η		88,5		%	at full load
Stand-by power	P _{stb}		50	75	mW	without load
International efficiency mark		VI				
Output Power	P _{out}			30	W	
Output Voltage	U _{out}	11,64 23,28	12 24	12,36 24,72	V _{DC}	
	Other output voltages on request.					
Output voltage tolerance	ΔU _{out PCB}			3	%	at PCB
Ripple Voltage	U _{r rms}			75	mV _{rms}	25°C ambient
Output Current	I _{out}			2,5 1,25	A	12V 24V
Max. Overload current	I _{out overload}		170 140		% of I _{out}	U _{IN} = 264V U _{IN} = 90V
Isolation	Galvanic isolation with safety extra low voltage (SELV) output					
Means of protection	2 x MOPP					
Dielectric Strength		4,4			kV _{AC}	50Hz sinusoidal waveform
Leakage current	I _{LK}			100	μA	
Internal Fuse	I _F		2		A	input L
	Approved for direct connection to 16A (20A) mains circuit.					
Operating Temperature	T _{OP}	-20		70	°C	free convection derating >50°C
Thermal protection	Insulated Cable Version Power Supply with H03V2V2 primary Cable min operating temperature is 5°C					
	The power supply is thermally protected against overload. The output voltage is reduced in over temperature conditions, it will return to normal once the temperature is reduced. Prolonged operation at or near the thermal limit will severely shorten operating life and is not recommended.					
Storage Temperature	T _{ST}	-30	25	80	°C	
Humidity				95	%	non condensing
Altitude				3000	m	Operating
						Except Terminal blocks variant at standard EN 60601-1 OVCIII: 2000m
Atmospheric Pressure		70		106	kPa	Except Terminal blocks variant at standard EN 60601-1 OVCIII: 80 to 106 kPa
Degree of protection by enclosure		IP68				cable version insulated cable version
Single component failure	A single component failure does not cause any damage to persons or ambient (fire, explosions, etc).					





Reliability		
MTBF 12V	42,71 years	at 50°C ambient
MTBF 24V	43,34 years	at 50°C ambient
MTBF calculation according to standards	MIL-HDBK-217 F; - Notice 1; - Notice 2	
Maintainability	The power supply is not to be repaired	

Output template	Temperature derating
<p>The power supply is protected against short circuit. A shorted output does not cause any damage, and normal operation will resume once the short is removed. The power supply is thermally protected against overload. The output voltage is reduced in over temperature conditions, it will return to normal once the temperature is reduced. Prolonged operation at or near the thermal limit will severely shorten operating life and is not recommended.</p>	<p>Linear derating from +50°C at 2,5%/°C to 50% load at +70°C</p>


Laser marking	Marking plate symbol explanation
Product name Input parameters Output parameters Safety instructions Date code CE marking Approval marks	Conformity with the relevant EU directives.
	ENEC is the high quality European Mark for electrical products that demonstrates compliance with European standards (EN).
	Conformity with the relevant UK regulations.
	NRTL Canada / USA Mark issued by Curtis Straus.
	The power supply has to be disposed appropriately according the local regulations for Waste Electrical and Electronic Equipment.
	For indoor use only.
	Read instruction manual.

Installation	
	Maximum mounting screw torque M=30Ncm Recommended screws: Slotted pan head screw ISO 1580 max. M3 Alternative: Phillips pan head screw ISO 7045 max. M3 Alternative: fillister socket head screw low design ISO 7984 max. M3 Alternative: fillister socket head screw ISO 4762 max. M3
	The power supply must be installed in an environment that allows heat dissipation, do not enclose it in thermally insulating material.



Cable – cable

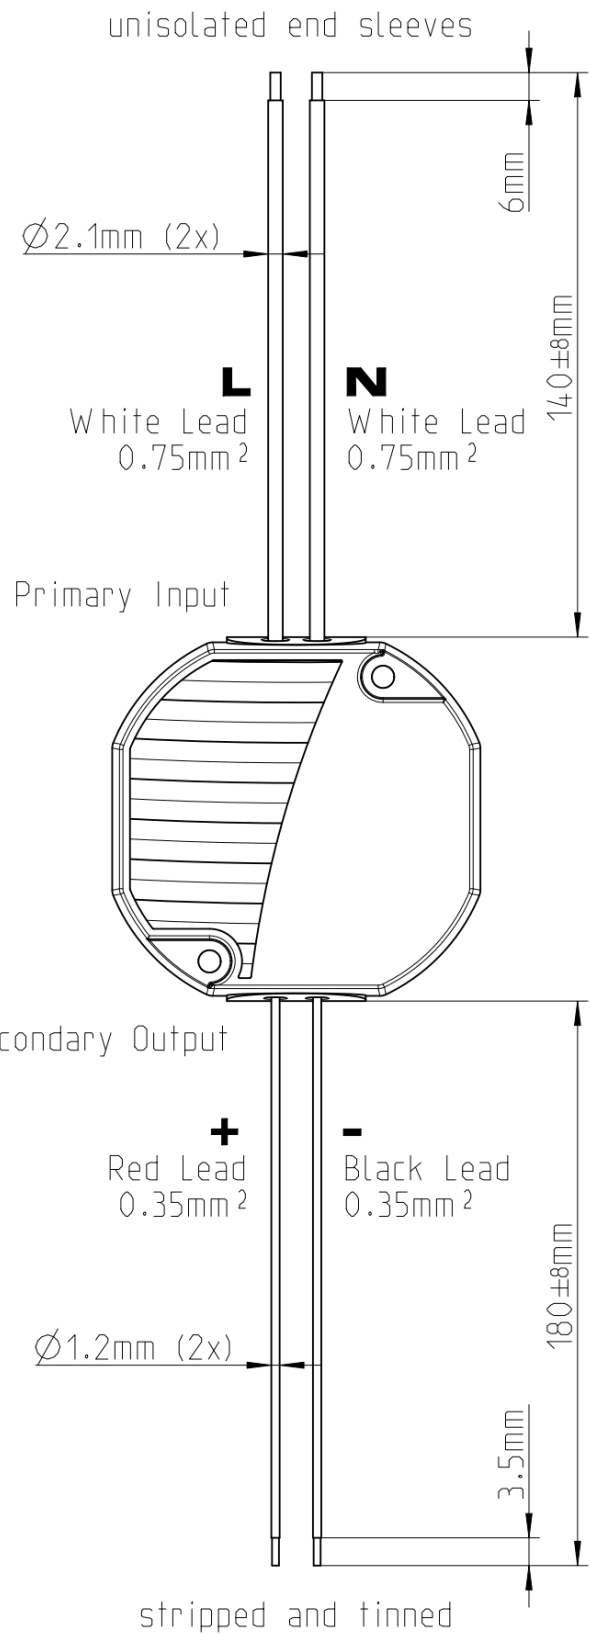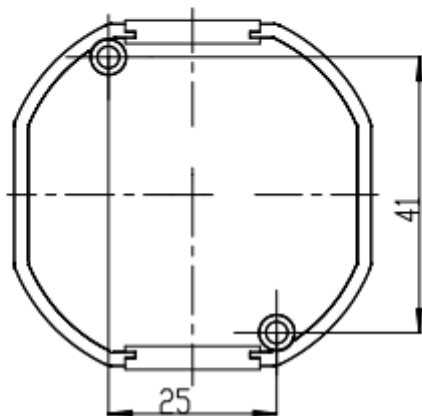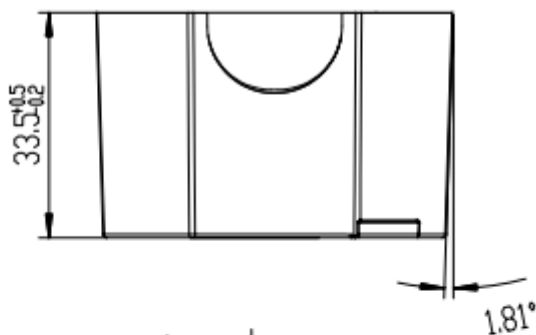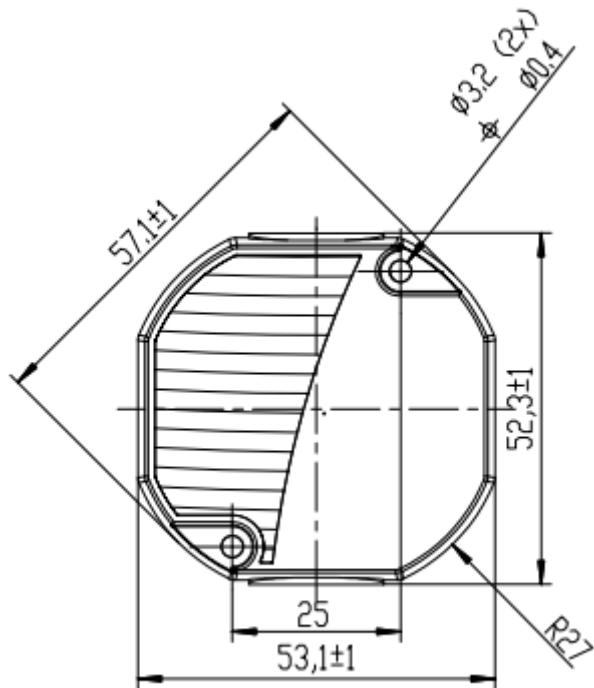


Printed circuit board module

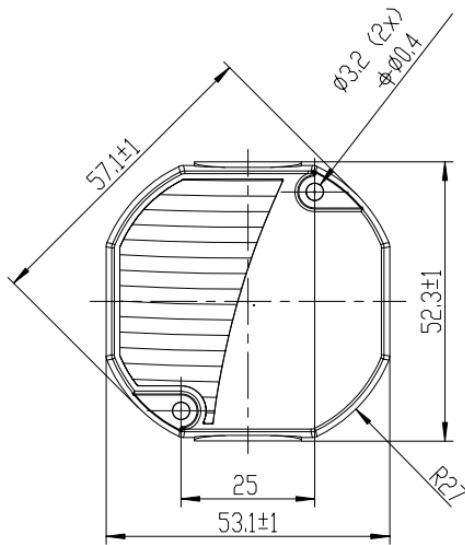

Pins:
Z8-Pin, $\phi 0.9$ mm

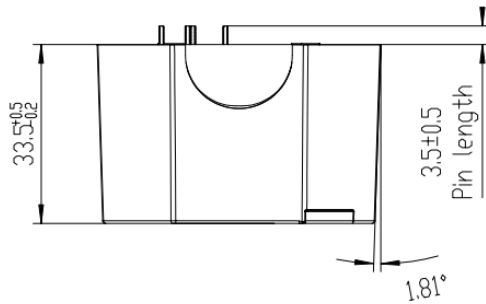


BOTTOM VIEW - Pinout

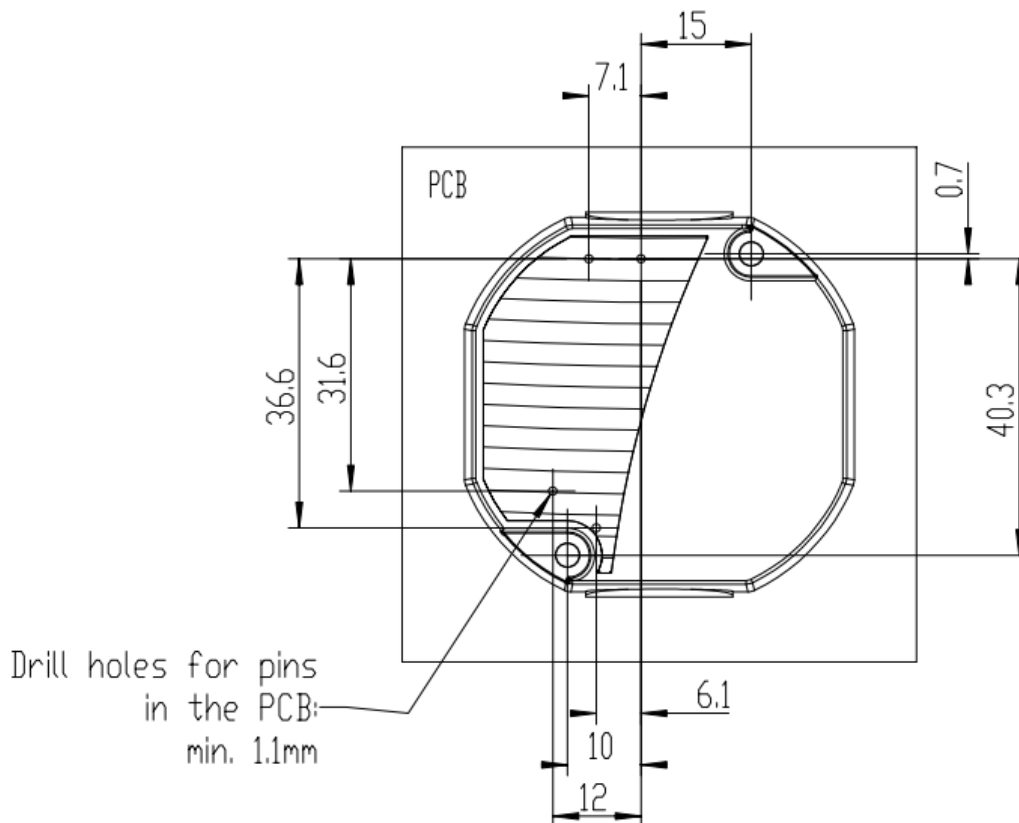

TOP VIEW - pins are on bottom side





Terminal version

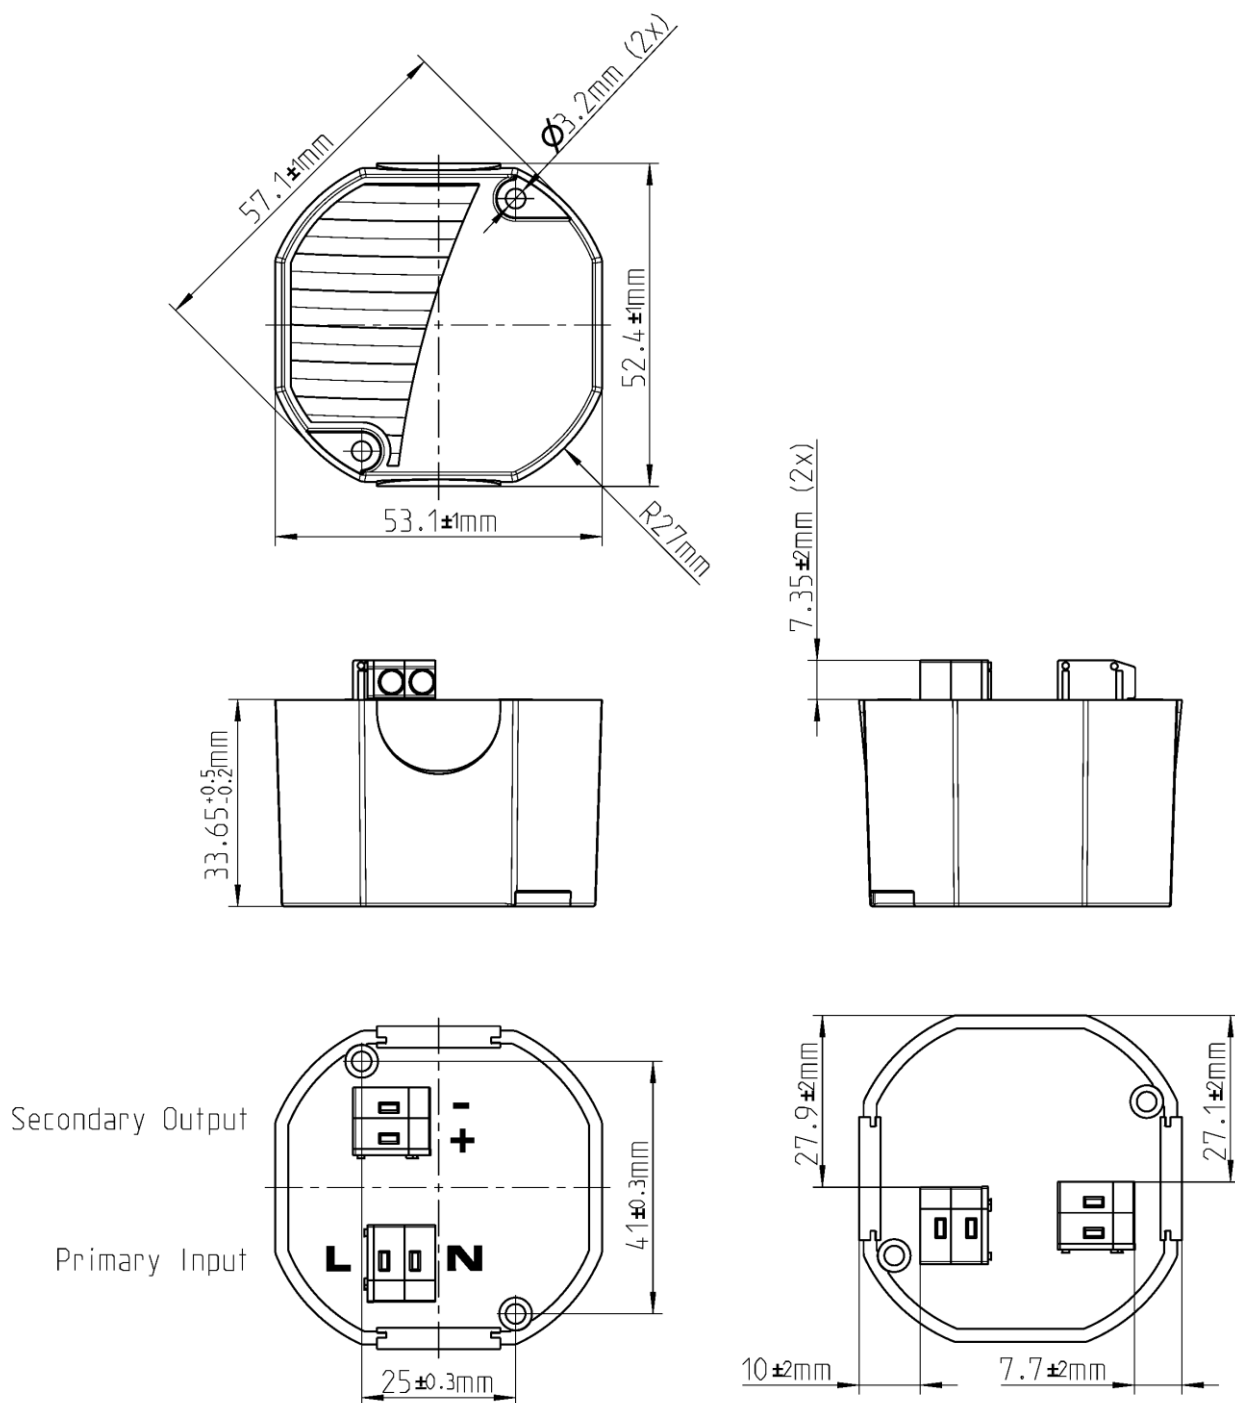

Connectors	Wire cross section (solid)	Wire cross section (stranded)
Wago 235-402	0,5 - 2,5mm ²	0,25 - 1,5mm ²
PTR AK4100/2-5.0	0,08 - 2,5mm ²	0,08 - 2,5mm ²
Dinkle 144R-XXP	0,5 - 2,5mm ²	0,55 - 2,5mm ²


N1hxyW3 30

Insulated cable version

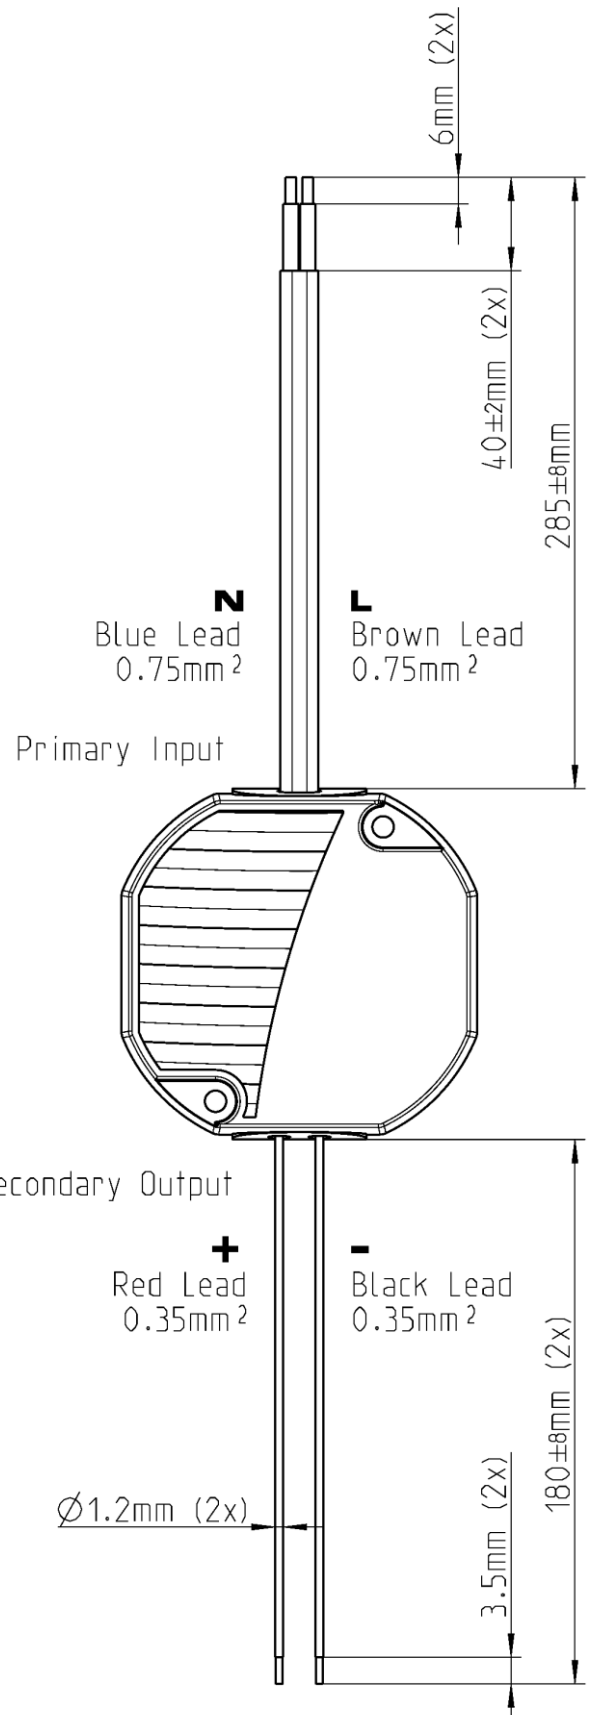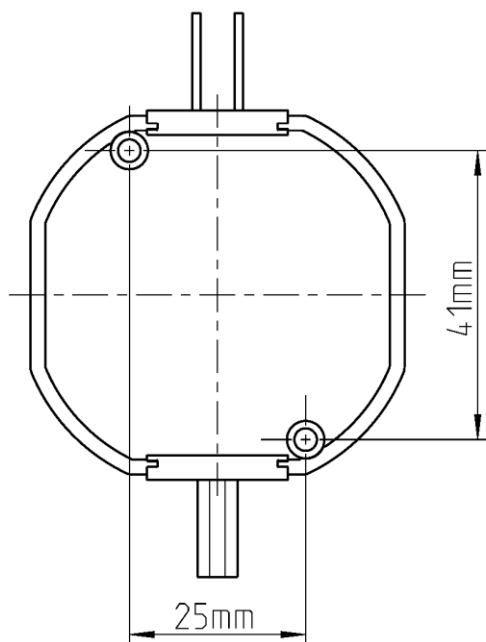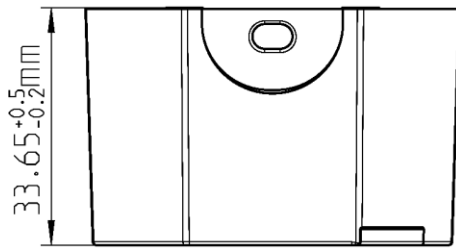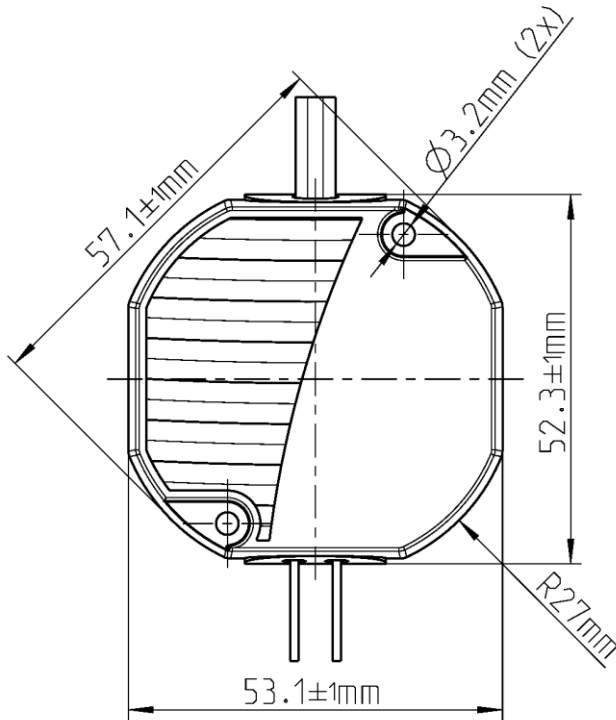

N1hxyW3 30

DIN rail version

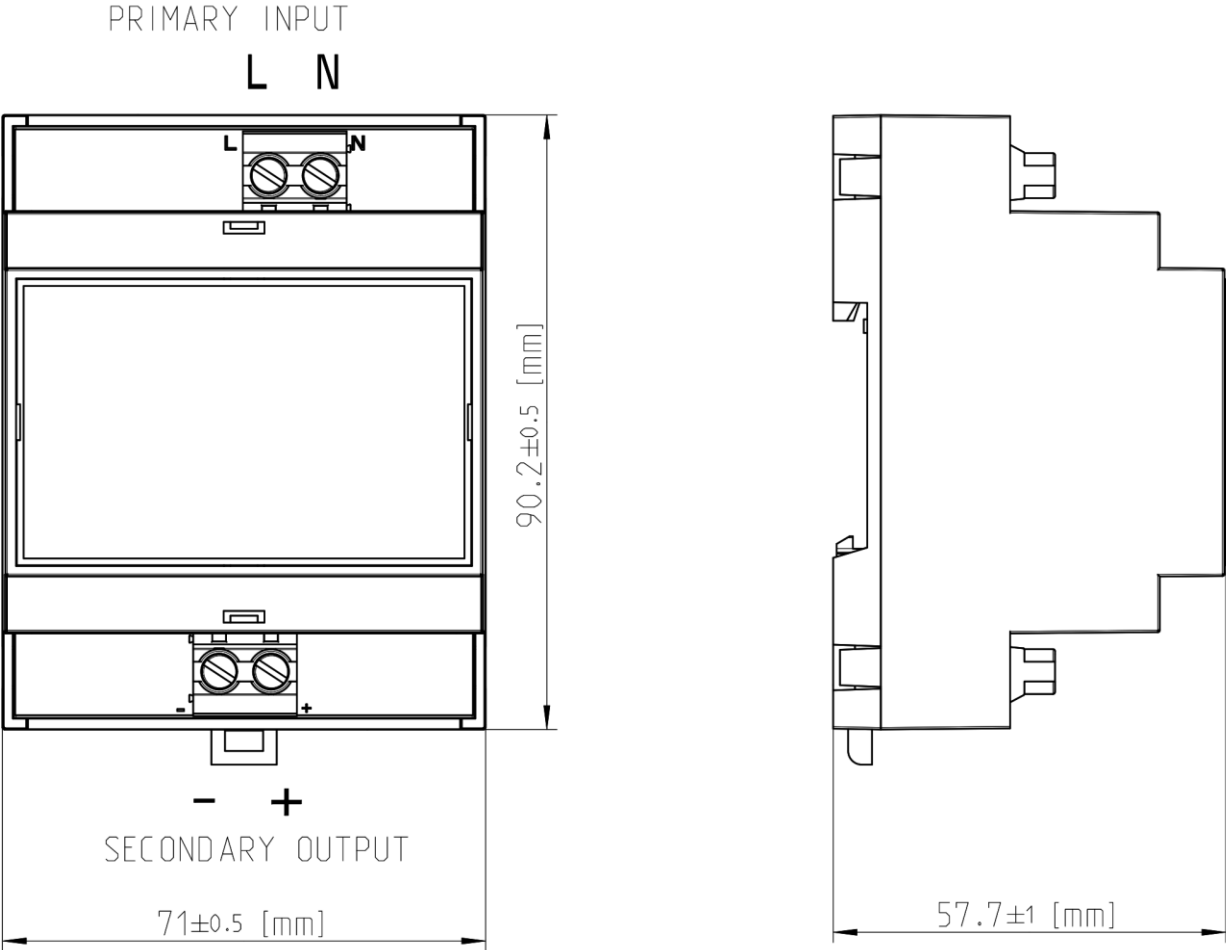

Test standards: Not all approvals from page 1 are currently applied at this housing version. It fulfill only: EN 55014-1, EN 55014-2, EN 55032, EN 55035, EN 60601-1-2, EN 60601-1 OVCIII
Other test standards can be done on request.




Connectors	Wire cross section (solid)	Wire cross section (stranded)
Degson: DG636-7.62-10040000700	0,2 - 6mm ²	0,2 - 4mm ²
Weidmüller: TPS 7.62/02/90 5.0SN GN BX	0,05 - 6mm ²	0,2 - 4mm ²

Packaging and weight			
	pcs	kg	size (mm)
Single Carton	1	0,16	90x72x55
Packaging Case	50	8,5	371x266x242
Full EU-Pallet Layer, 9 Packaging cases	450	77	1200x800x165
1 Full Pallet (8 Layer)	3600	630	1200x800x1500

EMC – Special requirements according medical standard (Only for medical devices)	
Intended use and intended environment	Home healthcare and/or Professional environment
Basic safety and essential performance of the EUT	The power supply unit is not a medical end product, therefore no essential performance is defined by the manufacturer.
Basic safety regarding EMC	The power supply has to ensure proper output voltage according to its characteristics, without service within expected service life.
WARNINGS	Medical electrical equipment needs special precautions regarding EMC and needs to be installed according to EMC information.
	PE of power supply shall be connected to PE of end medical product. User shall not modify power supply.
	The switch mode power supply is designed to achieve the EMI behavior of the specified environment, it includes specific EMI filter to reduce the emissions which are specified in the IEC60601-1-2 standard.
	Please read the complete technical documentation to avoid adverse events to the patient and operator. Read also instructions for use.

EMC - Environment			
The power supply is intended for use in the electromagnetic environment specified below. The customer or the user of the power supply should assure that it is used in such an environment.			
Emissions test	Compliance	Electromagnetic environment - guidance	
RF emissions CISPR 11	Group 1	The power supply uses RF energy only for its internal function. Therefore, its RF emissions are very low and are not likely to cause any interference in nearby electronic equipment.	
RF emissions CISPR 11	Class B	The power supply is suitable for use in all establishments, including domestic establishments and those directly connected to the public low-voltage power supply network that supplies buildings used for domestic purposes.	
Harmonic emissions IEC 61000-3-2	Complies		
Voltage fluctuations / flicker emissions IEC 61000-3-3	Complies		
Immunity test	EN 60601-1-2:2015 test level	Achieved levels according EN 60601-1-2:2015 and achieved levels from additional standards.	Electromagnetic environment - guidance
Proximity magnetic fields IEC 61000-4-39	30kHz , CW , 8A/m 134,2kHz , Pulse modulation 2,1kHz b), 65A/m c)	30kHz , CW , 8A/m 134,2kHz , Pulse modulation 2,1kHz b), 65A/m c)	b) The carrier shall be modulated using a 50% duty cycle square wave signal c) Immunity test level in A/m RMS before modulation is applied

	13,56MHz , Pulse modulation 50kHz b), 7,5A/m c)	13,56MHz , Pulse modulation 50kHz b), 7,5A/m c)	
Electrostatic discharge (ESD) IEC 61000-4-2	± 8 kV contact ±2 kV, ± 4 kV, ± 8 kV, ± 15 kVair	± 8 kV contact ±2 kV, ± 4 kV, ± 8 kV, ± 15 kVair	Floors should be wood, concrete or ceramic tile. If floors are covered with synthetic material, the relative humidity should be at least 30%.
Electrical fast transient/burst IEC 61000-4-4	± 2 kV 100 kHz repetition frequency	± 2 kV (mains input), 100 kHz ± 2 kV (DC output), 5 kHz	Mains power quality should be that of a typical commercial or hospital environment.
Surge IEC 61000-4-5	Line-Line:± 0,5 kV, ± 1 kV Line-to-ground: ± 0,5 kV, ± 1 kV, ± 2 kV	±1 kV symmetrical – Differential mode (AC), ±2 kV symmetrical – Common mode (AC), ±0.5 kV symmetrical – Differential mode (DC), ±0.5 kV symmetrical – Common mode (DC), 1.2/50 us Open Circuit Voltage	Mains power quality should be that of a typical commercial or hospital environment.
Voltage dips, short interruptions and voltage variations on power supply input lines IEC 61000-4-11	0 % Ut; 0,5 cycle At 0°, 45°, 90°, 135°, 180°, 225°, 270° and 315° 0 % Ut; 1 cycle and 70 % Ut; 25/30 cycles Single phase: at 0° 0 % Ut; 250/300 cycle	0 % Ut; 0,5 cycle At 0°, 45°, 90°, 135°, 180°, 225°, 270° and 315° 0 % Ut; 1 cycle and 70 % Ut; 25/30 cycles Single phase: at 0° 0 % Ut; 250/300 cycle	Mains power quality should be that of a typical commercial or hospital environment. If the user of the power supply requires continued operation during power mains interruptions, it is recommended that the power supply is powered from an uninterruptible power supply or battery.
Power frequency (50/60 Hz) magnetic field IEC 61000-4-8	30 A/m	1, 3, 30 A/m	Power should be at levels characteristic of frequency magnetic fields a typical location in a typical commercial or hospital environment.
Conducted RF IEC 61000-4-6	6 Vrms 150 kHz to 80 MHz	6 Vrms	Portable and mobile RF communications equipment should not be used closer to any part of the power supply, including cables, than the recommended separation distance. Recommended separation distances see following table.
Radiated RF IEC 61000-4-3	10 V/m 80 MHz to 2.7 GHz	10 V/m	
Field strengths from fixed transmitters such as base stations for radio (cellular/cordless) telephones, land mobile radios, amateur radio, AM and FM radio broadcast and TV broadcast, cannot be predicted theoretically with accuracy. To assess the electromagnetic environment due to fixed RF transmitters an electromagnetic site survey should be considered. If the measured field strength in the location in which the power supply is used, exceeds the applicable RF compliance level above, the power supply should be observed to verify normal operation. If abnormal performance is observed, additional measures may be necessary, such as reorienting or relocating the power supply.			
Field strengths from fixed RF transmitters, as determined by an electromagnetic site survey should be less than the compliance level in each frequency range. Over the frequency range 150 kHz to 80 MHz, field strength should be less than 3 V/m.			
Interference may occur in the vicinity of equipment marked with the following symbol: 			
Proximity fields from RF wireless	Frequency range and Level: RF wireless communication equipment		
	Test Frequency (MHz)	Modulation	Immunity Level (V/m)

communications equipment IEC 61000-4-3	385	**Pulse Modulation: 18Hz	27	Supplementary information: EUT powered at one of the nominal input voltages and frequencies. Dwell time minimum 1s. Actual dwell time noted in results table. Note * - As an alternative to FM modulation, 50% pulse modulation at 18Hz may be used because while it does not represent actual modulation, it would be worst case. Note ** - The carrier shall be modulated using 50% duty cycle square wave signal.
	450	*FM ±5Hz deviation: 1kHz sine	28	
	710 745 780	**Pulse Modulation: 217Hz	9	
	810 870 930	**Pulse Modulation: 18Hz	28	
	1720 1845 1970	**Pulse Modulation: 217Hz	28	
	2450	**Pulse Modulation: 217Hz	28	
	5240 5500 5785	**Pulse Modulation: 217Hz	9	

Recommended separation distances between portable and mobile RF communications equipment and the power supply

The power supply is intended for use in the electromagnetic environment in which radiated RF disturbances are controlled. The customer or the user of the power supply can help prevent electromagnetic interference by maintaining a minimum distance between portable and mobile RF communications equipment (transmitters) and the power supply as recommended below, according to the maximum output power of the communication equipment.

Rated maximum output power of transmitter (W)	Separation distance according to frequency of transmitter (m)		
	150 kHz to 80 MHz $d = 1.2\sqrt{P}$	80 MHz to 800 MHz $d = 1.2\sqrt{P}$	800 MHz to 2.5 GHz $d = 2.3\sqrt{P}$
0.01	0.12	0.12	0.23
0.1	0.38	0.38	0.73
1	1.2	1.2	2.3
10	3.8	3.8	7.3
100	12	12	23

For transmitters rated at a maximum output power not listed above, the recommended separation distance d in metres (m) can be determined using the equation applicable to the frequency of the transmitter, where P is the maximum output power rating of the transmitter in watts (W) according to the transmitter manufacturer.

NOTE 1 At 80 MHz and 800 MHz, the separation distance for the higher frequency range applies.

NOTE 4 These guidelines may not apply in all situations. Electromagnetic propagation is affected by absorption and reflection from structures, objects and people.

Energy Efficiency

This power supply family fulfills Directive 2009/125/EC with Commission Regulation (EU) 2019/1782. The values "Average active efficiency", "Efficiency at low load" and "No-load power consumption" are typical measured values, measured at one representative sample at an input voltage of 230VAC.

Input specification		
Input Voltage	100-240	VAC
Input Frequency	50-60	Hz

Output specification						
Output voltage	5	9	12	15	24	VDC
Output current	3	3	2,5	2	1,25	A
Output power	15	27	30	30	30	W
Average active efficiency (100%/75%/50%/25%)	82,62	87,22	88,49	88,04	89,82	%
Efficiency at low load (10 %)	77,13	82,79	83,64	83,66	83,58	%
No-load power consumption	42	47	48	51	58	mW

Revision	Date	Author	Change
A	16.07.2015	Mauritz	First edition
B	10.12.2015	Mauritz	Nomeclature changed, Description of symbols from marking plate added, EMC added
C	04.03.2016	Mauritz	Approvals changed
D	10.03.2016	Mauritz	Altitude and Atmospheric pressure added
E	28.10.2016	Mauritz	Temperature derating added
F	02.12.2016	Mauritz	PCB-/Insulated Cable-/Terminal-Version added
G	07.02.2017	Krimmel	IP68
H	25.04.2017	Mauritz	Connector at terminal version updated
I	08.05.2017	Mauritz	EMC (only for medical devices) updated
J	24.05.2017	Mauritz	Ordering Information changed
K	29.05.2017	Mauritz	Ripple Voltage changed, Housing Versions changed
L	07.07.2017	Mauritz	IP68 added; Mechanical parameter changed
M	07.08.2017	Mauritz	HV testing voltage changed
N	29.09.2017	Mauritz	MTBF added
O	23.03.2018	Trethan	Update to new document design
P	29.01.2020	Mauritz	Energy Efficiency added
Q	25.02.2020	Mauritz	Energy Efficiency changed, Test standards changed
R	17.11.2020	Mauritz	Trademark Pulse added
S	23.08.2021	Mauritz	Trademark Pulse removed
T	13.01.2022	Mauritz	UKCA mark added
U	09.08.2022	Mauritz	Packaging and weight changed
V	25.01.2023	Mauritz	Proximity magnetic fields added, EN 55024 changed to EN 55035
W	17.03.2025	Mauritz	Cable - cable housing: constitution of wires added
X	28.08.2025	Mauritz	New housing variant added: DIN rail power supply, Test standards changed, OVCIII added
Y	25.09.2025	Mauritz	Limitation of Altitude/Atmospheric Pressure for Terminal blocks variant at standard EN 60601-1 OVCIII

CONFIDENTIAL

This document contains proprietary information originated and/or owned by EGSTON System Electronics Eggenburg GmbH. This information shall not be duplicated, used or disclosed in whole, or in part, to any other party or used for any other purpose without the prior consent of EGSTON System Electronics Eggenburg GmbH.

Copyright © 2025 EGSTON System Electronics Eggenburg GmbH, A-3730 Eggenburg, Grafenbergerstraße 37, Austria
FN282750i (Krems/Donau), UID/VATIN: ATU62811014
All Rights Reserved.